

DAI Dry Contact


Model No: L30-6DDZ

Profile

- The DALI dry contact is small enough to fit in an 86-bottoming case;
- With 6 contacts and 2 common contacts

Features


- Standard DALI signal input
- Low voltage power supply DC12V
- Each contact function can be configured by software
- Manually set the address
- Small size, easy to install

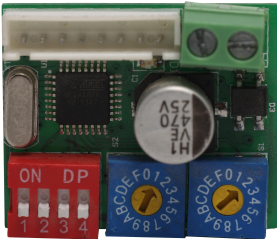

Technical Parameters

Model No	L30-6DDZ
Brand	LAMMIN
Input Signal	DALI signal
Input Voltage	DC 12V
Contacts	6
Certification	CE
Working Temp	-20℃~+50℃
Warranty	3 years
Size(L*W*H)MM	30*40*15

Wiring Diagram and Installations

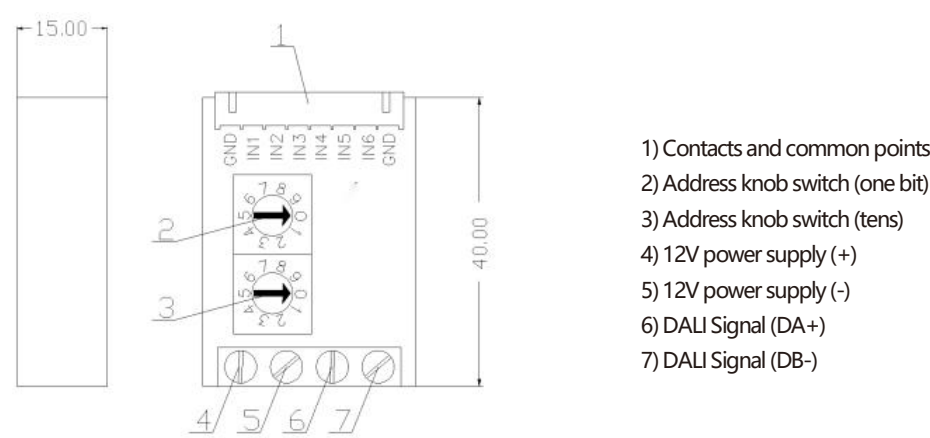

- After the power is connected, the indicator light will light up, indicates that the it is working normally.
- When addressing the device, or selecting the device, the LED light will blink.
- The device follows the DALI protocol, with the functions of bus addressing, address setting, on, off, and so on.

