

DALI Convert to DC 0/1-10V Dimmer (Relay)

Model No: L6293-01DP

Profile

- DALI convert to 0/1-10V output and has a 10A relay inside.
- It can be controlled independently as a relay switch with 220V power supply

Features


- DALI signals comply with IEC 62386.
- Build in 10A relay switch
- DC 1-10V/10A output
- AC voltage input, safe and reliable



Technical Parameters

Model No	L6293-01DP	L6293-04DP	L6293-01D
Brand	LAMMIN		
Input Signal	DALI signal		
Input Voltage	AC220V		DC 12-30v
Frequency Range	50Hz/60Hz		
Max Load Current	10A/CH*1	10A/CH*4	10A/CH*1
Max Output Power	DC 1-10V	DC 1-10V/CH*4	DC 1-10V
Certification	CE		
Working Temp	-20°C~+50°C		
Warranty	3 years		
Size(L*W*H)MM	140*45*28	126*88*65	140*45*28
Installation	35mm DIN rail		

Wiring Diagram and Installations

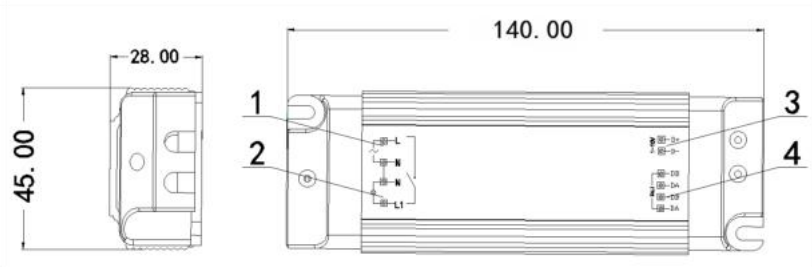

- After the power supply is turned on, the indicator lights up, indicating that the power supply of the device works normally.
- When inputs DALI signal and addresses the device, or selects the device, the LED indicator blinks.
- The device follows the DALI protocol, with the function of BUS addressing, address setting, on, off, and so on.
- Can also be manually switched through the button.