

DAI Convert to DC 0/1-10V Dimmer (Relay)

Model No: L6293-04DP

Profile

- DALI convert to 0/1-10V output with 10A relay inside.
- It can be controlled independently as a relay switch with 220V power supply

Features


- DALI signals comply with IEC 62386.
- Build in 10A relay switch
- 4 channel \*DC 1-10V/10A output
- AC voltage input, safe and reliable



Technical Parameters

|                  |               |
|------------------|---------------|
| Model No         | L6293-04DP    |
| Brand            | LAMMIN        |
| Input Signal     | DALI signal   |
| Input Voltage    | AC220V        |
| Output Voltage   | AC 0-220V     |
| Frequency Range  | 50Hz/60Hz     |
| Max Load Current | 10A/CH*4      |
| Max Output Power | DC 1-10V/CH*4 |
| Certification    | CE            |
| Working Temp     | -20℃~+50℃     |
| Warranty         | 3 years       |
| Size(L*W*H)MM    | 126*88*65     |
| Installation     | 35mm DIN rail |

Wiring Diagram and Installations

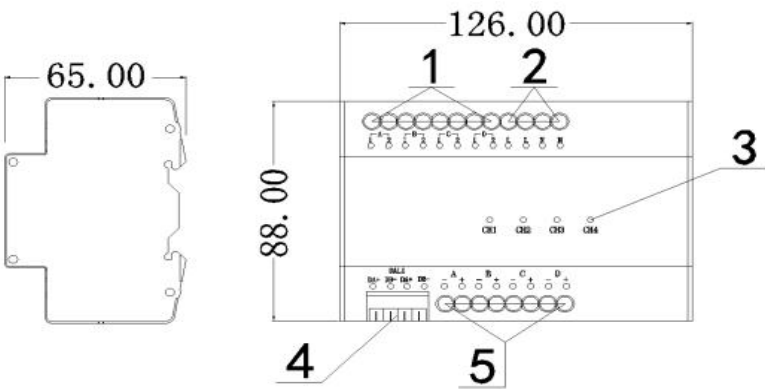

- 1) 4\*10A switch port
- 2) Input 220V (L, N)
- 3) 1-10V output manual button
- 4) DALI signal input
- 5) 4\*10A output 1-10V

- After the power supply is turned on, the indicator lights up, indicating that the power supply of the device works normally.
- When inputs DALI signal and addresses the device, or selects the device, the LED indicator blinks.
- The device follows the DALI protocol, with the function of BUS addressing, address setting, on, off, and so on.
- Can also be manually switched through the button.