

KNX Relay

Model No: L6293-08K

Profile

- KNX convert to 1-10V output , 8 channels 1-10V output with manual button
- DC24-30V DC power supply


Features

- 8*DC 1-10V/50mA
- AC voltage input, safe and reliable
- Short out protection, overload and over-voltage protection
- Long life span, small size and 35mm DIN-rail installation

Technical Parameters

Model No	L6293-08K
Brand	LAMMIN
Input Signal	KNX signal
Input Voltage	DC 30V
Frequency Range	50/60Hz
Dimming Output Power	8*DC 1-10V/50mA
Certification	CE
Working Temp	-20℃~+50℃
Warranty	3 years
Size(L*W*H)MM	72*88*65
Installation	35mm DIN rail
Photo	

Wiring Diagram and Installations

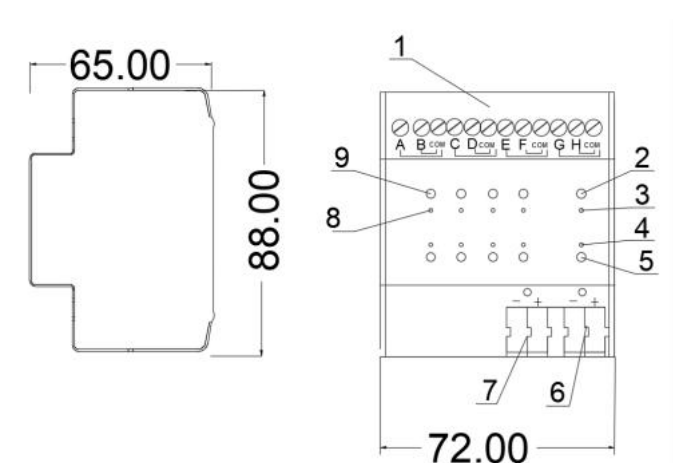

- 1)8*50mA output 1-10V
- 2)Manual switch button
- 3)Manual switch indicator
- 4)Programming button indicator
- 5)Programming button
- 6)Input power supply 30V DC
- 7)EIB bus connection terminal
- 8)8 channel manual indicator
- 9)8 channel way manual button